




- | | |
|---|------------------------------|
| 1. Power cable entry 3x1,5
(230Vx1-50Hz) | 3. Water loading pipe Ø3/4"G |
| 2. Water drain pipe Ø30 Hmax=14cm. | 4. Equipotential |
| | 5. Dosing pumps entry |

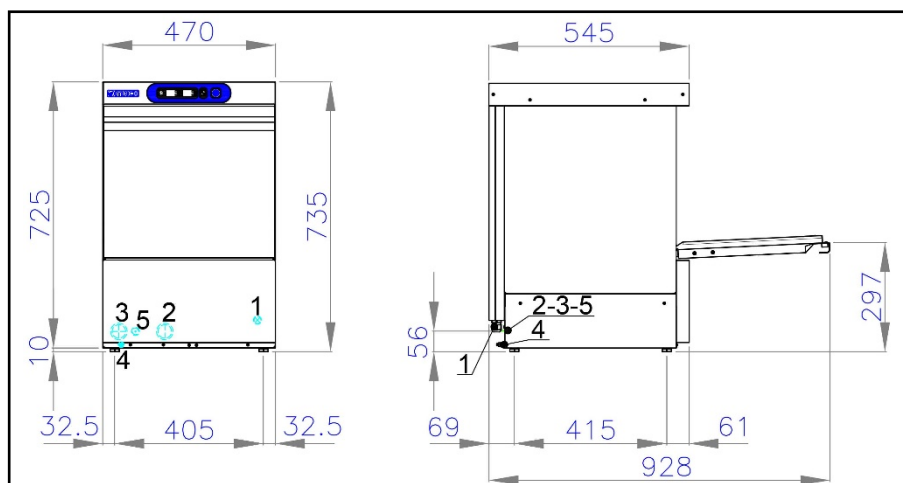

- Double wall.
- Tank with rounded corners.
- TOUCH control panel with 5 preset wash cycle times.
- Magnetic microswitch to cut out operation of the appliance when door is opened.
- Useful washing height 30,5 cm.
- Square basket 40x40 cm (supplied with 2 baskets for glasses, 1 saucer insert, 1 cutlery holders).
- Independent lower/upper washing and rinsing arms.
- Timed manual cold rinse.
- Washing cycle time 60-90-120-150-180 seconds (capacity 720÷2160 pz/h).
- Display show the boiler and tank temperature.
- Countdown of the washing cycle underway in minutes and seconds.
- Standard built-in rinse-aid pump.
- Self-cleaning cycle (CLN).
- Booster pump and built-in insulated atmospheric rinse tank made in AISI 304L stainless steel.
- Boiler and tank heating through thermostatically protected armoured heating elements (in exchange).
- Tank capacity lt. 12,5 and boiler capacity lt. 4,7.
- Water consumption per cycle lt. 2,7 – Water pressure input ATE 1,5-3,0 – Max temperature of inlet water 50°C.
- Tank heating element kW 1,4 – Boiler heating element kW 3,0.
- Washing pump power Hp 0,40.
- Booster pump power kW 0,30.
- Noise level at 1 mt. < 70 dbA.
- Total power kW 3,30.

Note