




- | | |
|---|------------------------------|
| 1. Power cable entry 3x1,5
(230Vx1-50Hz) | 3. Water loading pipe Ø3/4"G |
| 2. Water drain pipe Ø30 Hmax=14cm. | 4. Equipotential |
| | 5. Dosing pumps entry |

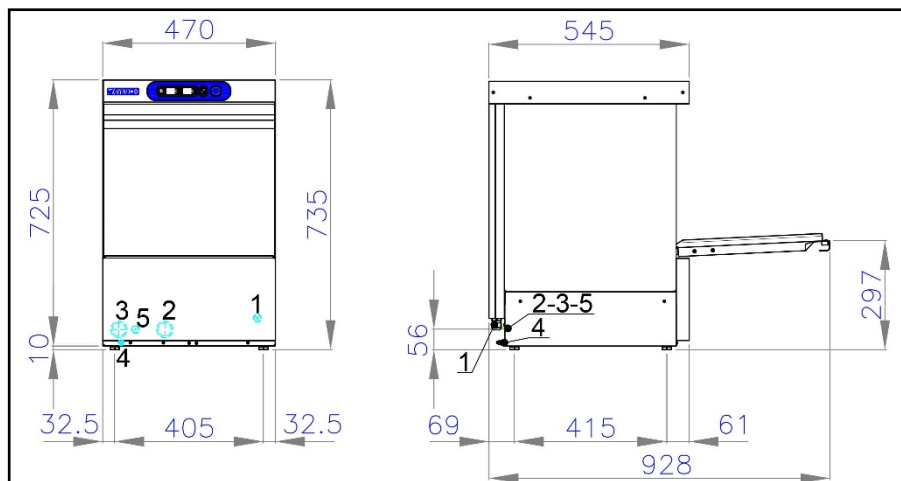

- | | |
|--|--|
| <ul style="list-style-type: none"> • Double wall. • Tank with rounded corners. • TOUCH control panel with 5 preset wash cycle times. • Magnetic microswitch to cut out operation of the appliance when door is opened. • Useful washing height 30,5 cm. • Round basket Ø40 cm. not swivelling (supplied with 2 baskets for glasses and 1 support frame for round basket, 1 saucer insert, 1 cutlery holders). • Independent lower/upper washing and rinsing arms. • Washing cycle time 60-90-120-150-180 seconds (capacity 720÷2160 pz/h). • Display show the boiler and tank temperature. • Countdown of the washing cycle underway in minutes and seconds. | <ul style="list-style-type: none"> • Standard built-in rinse-aid pump. • Self-cleaning cycle (CLN). • Built-in insulated boiler made in AISI 304L stainless steel. • Boiler and tank heating through thermostatically protected armoured heating elements (in exchange). • Tank capacity lt. 12,5 and boiler capacity lt. 4,7. • Water consumption per cycle lt. 2,7 – Water pressure input ATE 1,5-3,0 – Max temperature of inlet water 50°C. • Tank heating element kW 1,4 – Boiler heating element kW 3,0. • Washing pump power Hp 0,40. • Noise level at 1 mt. < 70 dbA. • Total power kW 3,30. |
|--|--|

Note